



# ART. 8530.101

## Hose reels - s. 530

Fixed hose reel, s.530, for air-water, 20 bar, with black rubber hose 20 m,  $\varnothing$  1/2"



**FLUIDS** FRESH OIL | ANTIFREEZE | AIR | WATER | NITROGEN/INFLATING USE

**SECTORS** AERONAUTIC | AGRICULTURE | AUTOMOTIVE | LUBE TRUCK AND INDUSTRIAL VEHICLE | BUILDING INDUSTRY AND ROAD CONSTRUCTION | RAILWAY TRANSPORT | MANUFACTURING INDUSTRY  
FRESH OIL | ANTIFREEZE | AIR | WATER | NITROGEN/INFLATING USE

**CERTIFICATIONS** ATEX (ZONE 2) | ATEX (ZONE 22)

Features	UM	Value
Pressure	bar	20
Compatible fluids		air - water
Swivel joint		brass
Seals		Viton®
Characteristic		fixed
Material		painted steel
Couplings		zinc plated steel
Hose		996.220
$\varnothing$ and hose length	$\varnothing$ - m	1/2" - 20
Inlet		G 1/2" (f)
Outlet		G 1/2" (m)
Reel flow path		brass - zinc plated steel
Internal drum width	mm	104

RAASM SpA

via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA  
Tel. 0039 0424 571111 - Fax. 0039 0424 571135


info@raasm.com - www.raasm.com

Copyright © 2019 All rights reserved to RAASM S.p.A.



## Overall dimensions

---

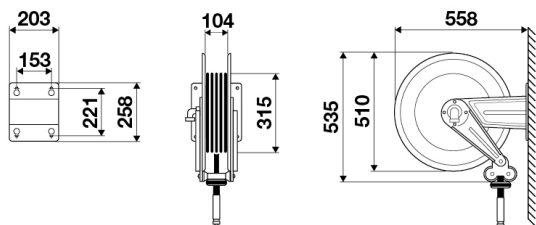

RAASM SpA

via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA  
Tel. 0039 0424 571111 - Fax. 0039 0424 571135

info@raasm.com - www.raasm.com

Copyright © 2019 All rights reserved to RAASM S.p.A.